

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/CA04/002065

International filing date: 02 December 2004 (02.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 60/526,179
Filing date: 02 December 2003 (02.12.2003)

Date of receipt at the International Bureau: 16 February 2005 (16.02.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

14 JANUARY 2005 14:01:05

PA 1257652


THE UNITED STATES OF AMERICA**TO ALL TO WHOM THESE PRESENTS SHALL COME:****UNITED STATES DEPARTMENT OF COMMERCE****United States Patent and Trademark Office****December 10, 2004**

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE UNDER 35 USC 111.**

APPLICATION NUMBER: 60/526,179

FILING DATE: December 02, 2003

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**

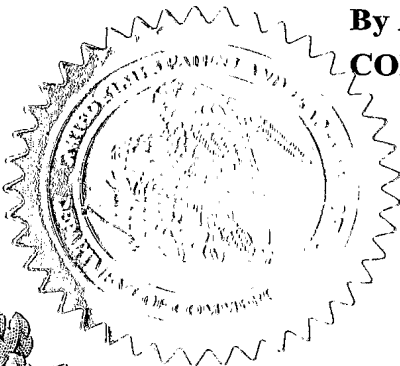

P. R. Grant
P. R. GRANT
Certifying Officer

Please type a plus sign (+) inside this box



PTO/SB/16 (5-03)

Approved for use through 04/30/2003. OMB 0651-0032

U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

INVENTOR(S)					
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)			
Mark Joseph	Murphy	Waterford, MI			
<input type="checkbox"/> Additional inventors are being named on the _____ separately numbered sheets attached hereto					
TITLE OF THE INVENTION (280 characters max)					
TRIM ATTACHMENT PROCESS					
Direct all correspondence to: CORRESPONDENCE ADDRESS					
<input checked="" type="checkbox"/> Customer Number	28886		<div>Place Customer Number Bar Code Label here</div>		
OR Type Customer Number here					
<input checked="" type="checkbox"/> Firm or Individual Name	Jay S. Paranjpe				
Address	Clark Hill PLC				
Address	500 Woodward Avenue, Suite 3500				
City	Detroit	State	MI	ZIP	48226-3435
Country		Telephone		Fax	
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification	Number of Pages	7	<input type="checkbox"/> CD(s), Number		
<input checked="" type="checkbox"/> Drawing(s)	Number of Sheets	4	<input type="checkbox"/> Other (specify)		
<input type="checkbox"/>	Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input type="checkbox"/>	A check or money order is enclosed to cover the filing fees				FILING FEE AMOUNT (\$)
<input checked="" type="checkbox"/>	The Director is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number				50-1759
<input type="checkbox"/>	Payment by credit card. Form PTO-2038 is attached.				\$160.00
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.					
<input checked="" type="checkbox"/>	No.				
<input type="checkbox"/>	Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted,

SIGNATURE

TYPED or PRINTED NAME Jay S. Paranjpe

TELEPHONE

313-965-8300

Date

12/02/2003

REGISTRATION NO.

45,486

(if appropriate)

Docket Number:

19365-095870

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Mail Stop Provisional Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

CERTIFICATE OF MAILING BY EXPRESS MAIL

EXPRESS MAIL MAILING LABEL NO. EL 962720951 US

I hereby certify that this paper (along with any paper referred to as being attached or enclosed) is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on December 2, 2003, 2003 and is addressed to: Mail Stop Provisional, Commissioner for Patents, PO Box 1450, Alexandria, VA 22313-1450

By: J. S. Paraj

Attorney Docket No :19365-095870

TRIM ATTACHMENT PROCESS

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The invention relates to a trim cover for a motor vehicle seat. More particularly, the invention relates to a method of attaching a leather trim cover to a foam pad of a motor vehicle seat.

2. Description of the Related Art

[0002] A seat cushion or seat back of a motor vehicle seat is typically formed from a foam pad covered by a trim cover. Typically, the trim cover and the foam pad are attached to one another by an adhesive material or by sewing the trim cover to the foam pad. Various materials can be used for the trim cover, including cloth, vinyl, and leather. Leather is a particularly desirable trim cover material due to its luxurious appearance and comfortable feel. One problem that is, however, seen with leather trim covers is the formation of wrinkles or creases along the leather as it is stretched under a load. This detracts from the overall appearance of the seat. Typically, the wrinkling is the result of an insufficient attachment between the leather trim cover and the foam pad.

[0003] Thus, there is a need for a method of attaching a leather trim cover to a foam pad that eliminates wrinkles along the leather trim cover.

SUMMARY OF THE INVENTION

[0004] According to one aspect of the invention, a method of attaching a leather trim cover to a foam pad utilizes a laminate. The laminate includes a double-sided adhesive film secured to a top surface and a heat-activated adhesive applied along a bottom surface. The method includes the steps of placing the top surface of the laminate against the leather trim cover; applying the bottom surface of the laminate to the foam pad; and heating the bottom surface of the laminate to bond the heat-activated adhesive to the foam pad and couple the leather trim cover thereto.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] Advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

[0006] Figure 1 is a perspective view of a motor vehicle seat including a leather trim cover;

[0007] Figure 2 is a cross-sectional view of the attachment of the leather trim cover to a foam pad according to a method of the invention;

[0008] Figure 3 is a cross-sectional view of a laminate utilized to attach the leather trim cover to the foam pad; and

[0009] Figure 4 is a cross-sectional view similar to Figure 2 including a foam foundation pad disposed between the leather trim cover and the foam pad.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0010] Referring to Figure 1, a seat 10 is provided for supporting an occupant within a motor vehicle passenger compartment 12. The seat 10 includes a trim cover, generally indicated at 14, which provides the seat 10 with an aesthetically pleasing appearance that complements the passenger compartment 12.

[0011] Referring to Figure 2, the trim cover 14 includes an outer or support surface 16 and an opposing inner surface 18. In a preferred embodiment, the trim cover is a natural leather trim cover 14, such as cowhide, horse hide, or another animal hide. The trim cover 14 may also be formed from a synthetic or artificial leather material.

[0012] The leather trim cover 14 covers a foam pad 20, which is well-known to those of ordinary skill in the art, to form the seat 10. It should be appreciated that one or more leather

trim covers 14 may be utilized to fully cover the foam pad 20. The foam pad 20 is molded to a particular shape and includes an upper surface 22. Preferably, the foam pad 20 is formed from a urethane foam material.

[0013] Referring to Figure 3, an intermediate laminate, generally shown at 24, is positioned between the leather trim cover 14 and the foam pad 20. The laminate 24 is cut to the shape of the leather trim cover 14. The laminate 24 includes a base portion 26 extending between a top surface 28 and an opposing bottom surface 30.

[0014] Referring to Figure 3, a double-sided adhesive film 32 is coupled to the laminate 24. The adhesive film 32 includes opposing first 34 and second 36 adhering surfaces. The first adhering surface 34 is bonded to the top surface 28 of the laminate 24. The second adhering surface 36 is covered by a protective cover 38, which is formed from a paper-like material. The cover 38 is removed to expose the second adhering surface 36 for bonding the laminate 24 to the leather trim cover 14. The second adhering surface 36 is pressure-sensitive such that the laminate 24 must be compressed against the leather trim cover 14 to effect the bond thereto. Together, the leather trim cover 14 and the laminate 24 are placed in an oven for preheating at a low temperature, which makes the leather trim cover 14 more pliable.

[0015] The bottom surface 30 of the laminate 24 is disposed along the upper surface 22 of the foam pad 20, as shown in Figure 2. The bottom surface 30 of the laminate 24 is coated with a heat-activated adhesive 40. Upon the introduction of heat, the heat-activated adhesive 40 is cured to bond the laminate 24 to the foam pad 20 and couple the leather trim cover 14 thereto. The heat may be provided in various ways including, but not limited to, heat injection into the foam pad 20, hot air induction, and heater pad activation.

[0016] Referring to Figure 4, an intermediate foam foundation pad, generally shown at 42, may be positioned between the leather trim cover 14 and the foam pad 20. When the foam foundation pad 42 is utilized, the laminate 24 attaches the leather trim cover 14 to an upper end 44 of the foam foundation pad 42 instead of the foam pad 20. The foam foundation pad 42 provides additional padding below the leather trim cover 14 to give the seat 10 more cushioning.

The foam foundation pad 42 is cut to a desired shape to match that of the leather trim cover 14 prior to the coupling therewith.

[0017] An adhesive film 46 is positioned between a lower end 48 of the foam foundation pad 42 and the upper surface 22 of the foam pad 20. The film 46 is coated with a friction reducing agent, as is known to those skilled in the art. As a result, the film 46 prevents friction between the foundation foam pad 42 and the foam pad 20.

[0018] In a method of attaching the leather trim cover 14 to the foam pad 20 according to the invention, the top surface 28 of the laminate 24 is placed against the inner surface 18 of the leather trim cover 14, as shown in Figure 2. The cover 38 is removed prior to placing the laminate 24 against the leather trim cover 14 to expose the second adhering surface 36 of the double-sided adhesive 32, which is disposed along the top surface 28. The top surface 28 of the laminate 24 is pressed against the leather trim cover 14 to bond the laminate 24 thereto. The bottom surface 30 of the laminate 24 is then applied to the upper surface 22 of the foam pad 20. Finally, heat is applied to the bottom surface 30 of the laminate 24 to cure the heat-activated adhesive 40 and bond the laminate 24 to the foam pad 20. Thus, the leather trim cover 14 is attached to the foam pad 20.

[0019] If the foam foundation pad 42 is utilized, the bottom surface 30 of the laminate 24 is first applied to the upper end 44 of the foam foundation pad 42. Heat is applied to the bottom surface 30 of the laminate 24. The heat cures the heat-activated adhesive 40 along the bottom surface 30 to bond the laminate 24 to the foam foundation pad 42. The cover 38 is then removed from the top surface 28 of the laminate 24 to expose the second adhering surface 36 underneath. The laminate 24 is then placed against the leather trim cover 14 such that the second adhering surface 36 abuts the inner surface 18 of the leather trim cover 14. The laminate 24 is pressed against the leather trim cover 14 to bond the laminate 24 thereto. Thus, the leather trim cover 14 is attached to the foam foundation pad 42. The leather trim cover 14, along with the foam foundation pad 42 secured thereto by an adhesive bond, is secured to the foam pad 20 to form the seat 10.

[0020] The use of the laminate 24 to attach the leather trim cover 14 to the foam pad 20 (or to the foam foundation pad 42) eliminates wrinkling along the leather support surface 16. The resistance to wrinkling is brought about by the continuous bonding of the laminate 24 to both the leather trim cover 14 and the foam pad 20. The laminate 24 also provides additional support to the leather trim cover 14 and aids in restricting stretching thereof. Thus, the leather trim cover 14 is not able to float or move relative to the foam pad 20, thereby eliminating wrinkling along the leather trim cover 14.

[0021] It should be appreciated that the trim cover attachment method as disclosed may be used to form various components including, but not limited to, a seat cushion, seat back, bolster, headrest, door panel, instrument panel, armrest, or visor.

[0022] The invention has been described in an illustrative manner. It is to be understood that the terminology, which has been used, is intended to be in the nature of words of description rather than of limitation.

[0023] Many modifications and variations of the invention are possible in light of the above teachings. Therefore, within the scope of the appended claims, the invention may be practiced other than as specifically described.

What is claimed:

1. A method of attaching a leather trim cover to a foam pad using a laminate having a double-sided adhesive film along a top surface and a heat-activated adhesive along an opposing bottom surface, the method comprising the steps of:

placing the top surface of the laminate against the leather trim cover to bond the laminate thereto;

applying the bottom surface of the laminate to the foam pad; and

heating the bottom surface of the laminate to cure the heat-activated adhesive and bond the leather trim cover to the foam pad.

ABSTRACT

A method of attaching a leather trim cover to a foam pad utilizes a laminate. The laminate includes a double-sided adhesive film secured to a top surface and a heat-activated adhesive applied along a bottom surface. The method includes the steps of placing the top surface of the laminate against the leather trim cover; applying the bottom surface of the laminate to the foam pad; and heating the bottom surface of the laminate to bond the heat-activated adhesive to the foam pad and couple the leather trim cover thereto.



FIG.
1

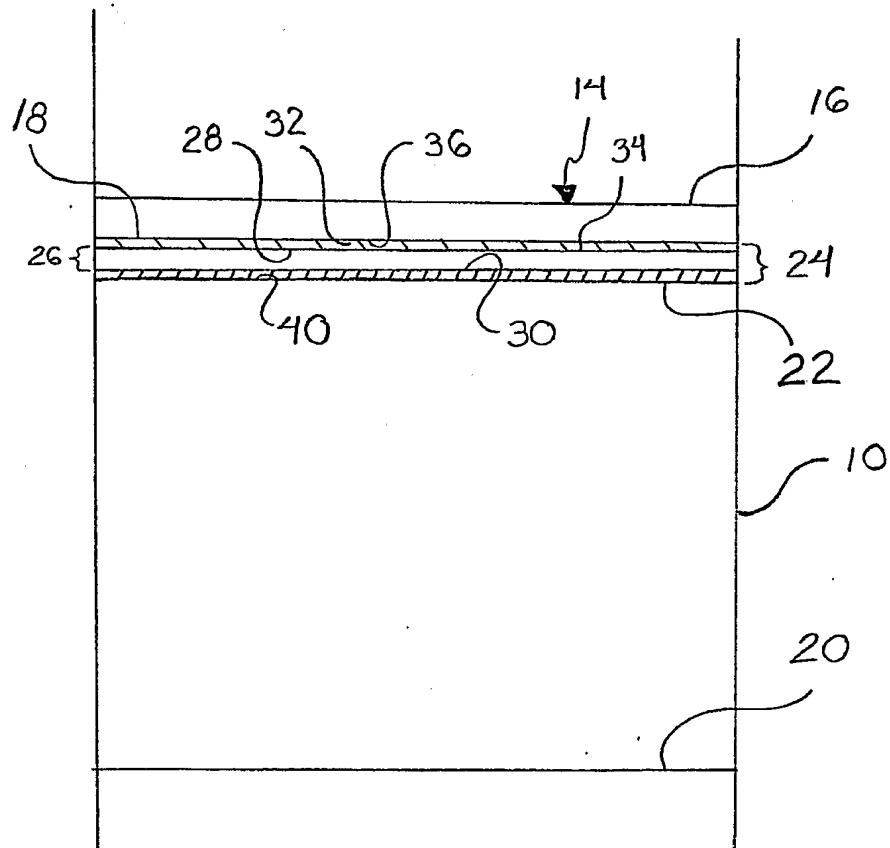


FIG. 2

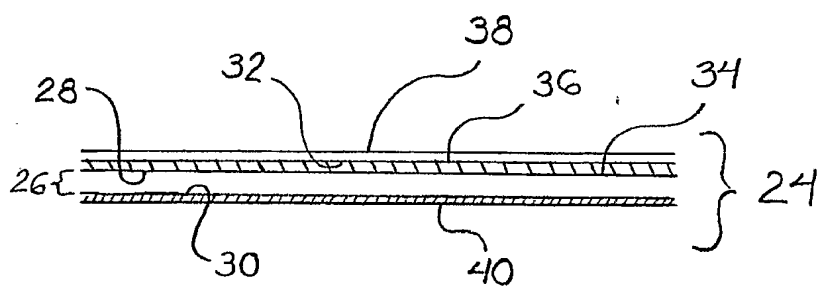


FIG. 3

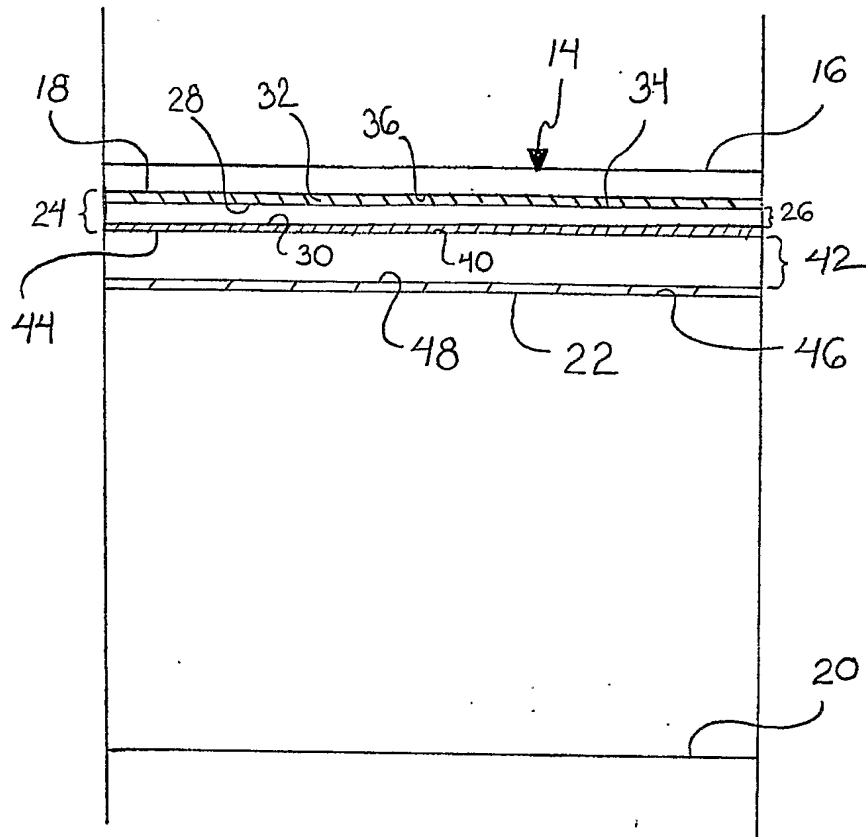


FIG. 4